

Instruction for 6.6kW Charger



1. Overview

The 6.6kW charger was specially designed for supplying the electricity for an electric vehicle's power battery, on the basis of the national standards for the charger. This product has the advantages of not only high efficiency, small size, high stability, long lifespan, but also high protection grade, and high reliability and complete protection function, etc. It's definitely an ideal charging power supply for electric vehicles. This charger has a built-in heat-sensing device and can automatically recover through the thermal protection. Fully sealed potting process and up to IP67 protection level ensures there is no trouble in any complex environment.

Key Features:

Fully sealed potting process, water cooling (modular optional)	Work reliably under -35°C - +85°C
Built in thermal sensor	Cut off output under dangerous operations conditions (internal 95°C)
Protection level IP67	Work safely in the short-term immersion conditions

2. Essential Parameter

Input Voltage Range	Input Current	Output Voltage Range	Max Output Current	Power Factor	Full-load Efficiency
AC90~265V	32A	110V~400VDC	20A	≥0.99 (half-load more)	≥93%

3. Features

Low Voltage Output	Output Mode	Constant Voltage
	Output Voltage	12.5V OR 13.5V
	Rated Current	5A
	CV Accuracy	±2%
	Maximum Current	5.5A±0.5A
	Output Power	≥62.5W
	Ripple Voltage Coefficient	1%
Input	Frequency	45-65Hz
	Stand-by Consumption	≤5W
Main Output	Output Mode	CV / CC
	Output Power	6600W@220VAC 3300W@110VAC
	CV Accuracy	±1%
	CC Accuracy	±2%
	Ripple Voltage Coefficient	5%
Communication Function	CAN Communication	Yes
	Baud Rate	125Kbps、250Kbps、500Kbps
	Terminal Resistance	N/A

4. Protection function

Input Over-voltage Protection	AC280±5V
Input Under-voltage Protection	AC85±5V
Output Over-voltage Protection	Stop the output when exceeds + 1% of the maximum output voltage
Output Under-voltage Protection	Stop the output when below -5% of the minimum output voltage
Output Over-current Protection	Stop the output when exceeds + 1% of the maximum output current
Over-temperature Protection	Power down from 90 °C and turn off at 95°C
Short-circuit Protection	Stop Output
Battery Reverse Connect Protection	Fuse Burn-out
Ground Protection	≤100mΩ



CAN communication Protection	Automatically stop the output when CAN communication fails
Power-off Protection	Yes

5. Safety and others



Withstand Voltage	Input to Output: 2000VAC≤10mA Input to Ground: 2000VAC≤12mA Output to Ground: 2000VAC≤10mA, all 1min
Insulation Resistance	Input, output, signal terminal to casing≥10MΩ Testing Voltage 1000VDC
Electromagnetic Immunity	GB/T 18487.3-2001 11.3.1
Electromagnetic Abusive	GB/T 18487.3-2001 11.3.2
Harmonic Current	GB 17625.1-2003 6.7.1.1
Inrush Starting Current	≤48A
Current-rise Time	≤5S, Overshoot ≤5%
Close Response time	100% 10% ≤50mS, 100% 0% ≤200mS
Protection Level	IP67
Vibration Resistance	10—25Hz Amplitude 1.2mm, 25—500Hz 30m/s ² , 8hrs per direction
Noise	≤60dB
MTBF	150000H
Work Environment	Relative Temp 5%-95% No condensation
Working Temperature	-35°C ~ +85°C
Storage Temperature	-55°C ~ +100°C

6. Installation Dimensions & Interface Definition

1). Installation Dimensions (Air-cooled)

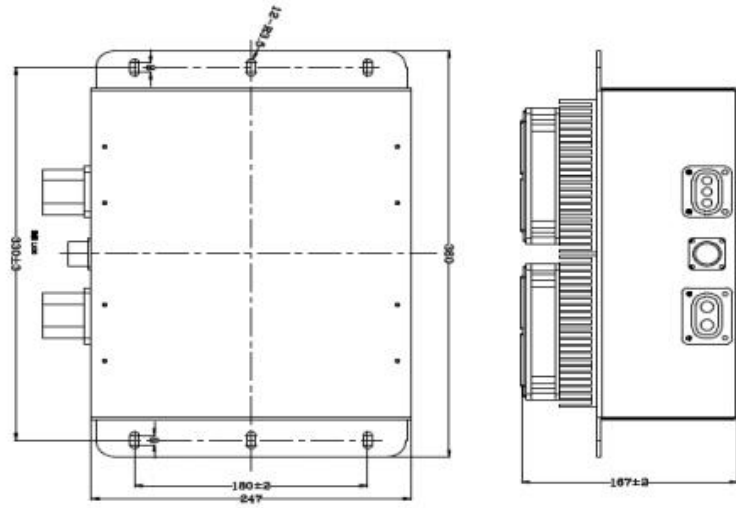

2). Installation Dimensions (Water-cooled)

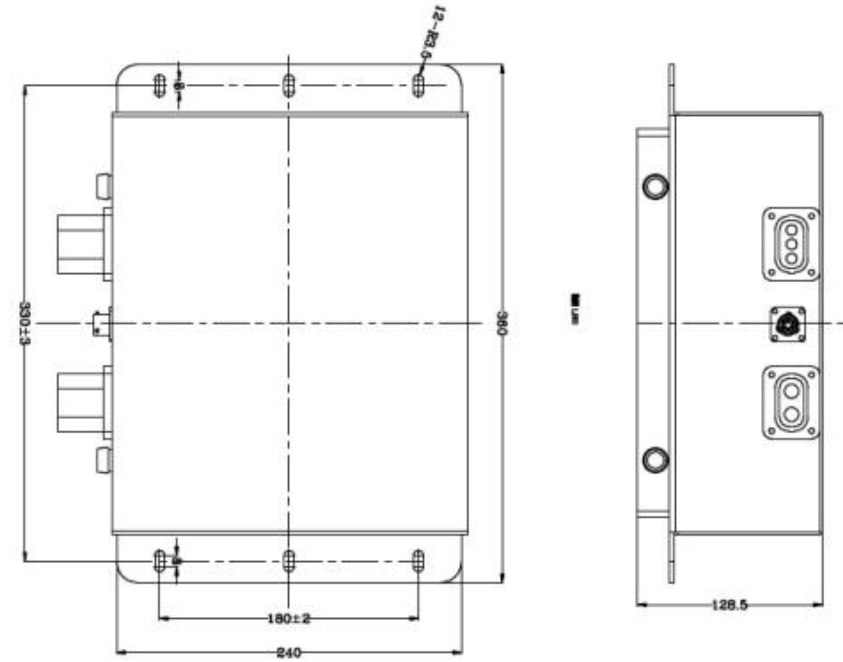

Interface Definition

S. N.	Port Name	Terminal Definition	Connector Model	Matching Connector	Vender
1	Charger's AC Input	A-Null line, B-Fire Line, D-GND	DY7-4ZJN	DY7-4TKPIN	XINX I
2	Charger's DC Output	A-Positive B-Negative	DY7-4ZJW 75°	DY7-4TKP1W	XINX I
3	Signal Control	A-CANL, B-CANH, C-CANGND, D-12V+, E-12V-, F-12V200mA	DY7-6ZJN	DY7-6TKP1N	XINX I

7. LED status

1). Initial State

Red Off Green Off Red Off Green Off Red Off Green Off Red Off Green Off

2). Charging State

Red Off Red Off Red Off Red Off Red Off Red Off Red Off Red Off

3). Stand-by State

Green Off Green Off Green Off Green Off Green Off Green Off Green Off

4). Fault State

Red Green Red Green.....Other error status word error

Red Green.....Wrong Battery

Red Green Red.....Wrong Communication


Green Red.....Wrong Input Voltage

Green Red Green.....Internal Temperature Protection


Green Red Green Red.....Wrong Hardware

8. Schematic diagram and the efficiency curve

1). Schematic Diagram

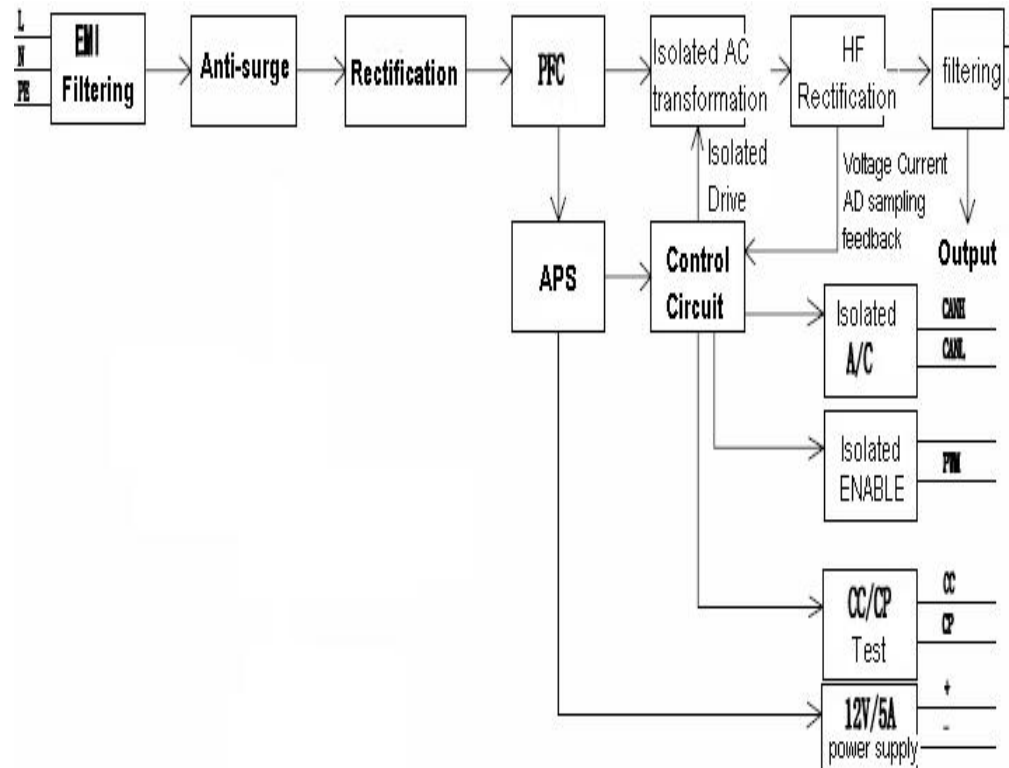

2). Efficiency Curve

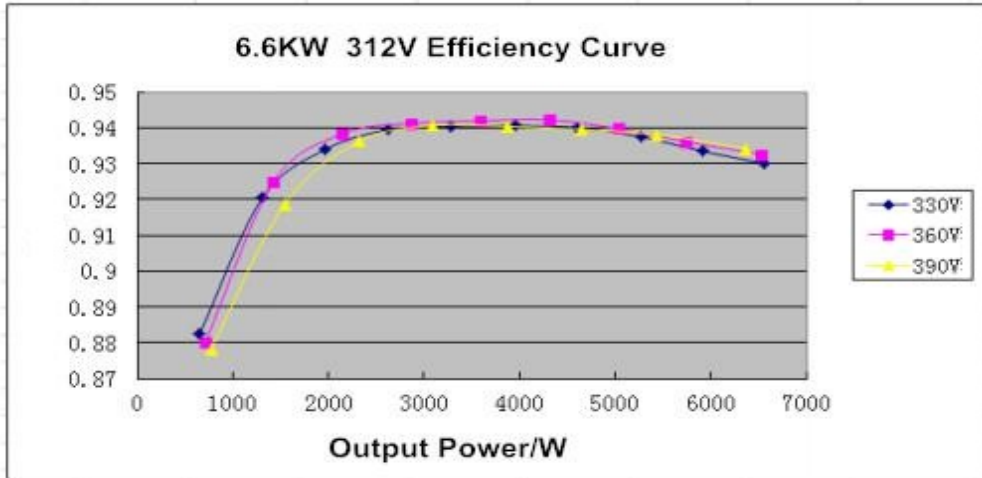

chemicals, acid and alkali substances etc.,. Avoid storing in the sun, fire, water and avoid storing with corrosive substances. The storage period is 2 years (from the inventory date of the factory). After the 2 years of storage period, the products should still comply with the provisions of the relevant standards.

9. Appearance Requirements

- 1). Outer surface should be smooth without obvious defects such as scratches, deformation. Surface coating should be uniform.
- 2). The nameplates and signs should be installed firmly with the neat handwriting.
- 3). Spare parts should be fastened reliably without rust, burrs, cracks and other defects and damage.
- 4). Each product should be marked with product identification in an obvious place, including a part number, product brand, product type, production number, name of production enterprises, the warning message, etc

10. Packaging, Transport and Storage

1). Packaging

On the packing box, there is a product name, product part number, product brand, product type, production number and the name of the manufacturer; In the packing box, along with the technical documents, it includes a packing list, quality certificate, and product specification.

2). Transportation

Suitable for cars, boats, aircraft, transportation. The products have to be protected against sunshine and moisture and in a civilized transportation.

3). Storage

Product should be stored in the packing box when it is not in use and be maintained in a 5 °C to 40 °C clean, dry and well-ventilated environment. It should not be stored together with